





USAARL REPORT NO. 81-7



AD A 108093

OPERATOR'S MANUAL FOR VARIABLE WEIGHT, VARIABLE C.G. HELMET SIMULATOR (Reprint)

By Craig M. Svoboda James C. Warrick Simula, Inc.

BIODYNAMICS RESEARCH DIVISION

September 1981



U.S. ARMY AEROMEDICAL RESEARCH LABORATORY
FORT RUCKER, ALABAMA 36362

DISTRIBUTION STATEMENT A

Approved for public release; Distribution Unlimited



NOTICE

Qualified Requesters

Qualified requesters may obtain copies from the Defense Technical Information Center, Cameron Station, Alexandria, Virginia. Orders will be expedited if placed through the librarian or other person designated to request documents from the Defense Technical Information Center.

Change of Address

Organizations receiving reports from the US Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

Disclaimer

The views, opinions, and/or findings contained in this report are those of the authors and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

Reviewed:

KENT A. KIMBALL

Dir, Extramural Research Program

Released for Publication:

Chairman, Scientific Review

Committee

STANLEY C. KNAPP

Colonel, MC Commanding UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE (When Date Enter

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1 REPORT NUMBER 2. GOVT ACCESSION NO.	
USAARI, Rpt No. 81-7	
4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
Operator's Manual for Variable Weight,	Reprint
Variable C.G. Helmet Simulator	
	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(a)	B. CONTRACT OR GRANT NUMBER(+)
Craig Svoboda	l -
James C. Warrick	DAMD-17-80-C-0089
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Simula Inc.	
2223 South 48th Street	
Tempe, Arizona 85282 11. CONTROLLING OFFICE NAME AND ADDRESS	
SGRD-UAD-IV	12. REPORT DATE September 1981
US Army Aeromedical Research Laboratory	13. NUMBER OF PAGES
Ft. Rucker, AL 36362	21
14. MONITORING AGENCY NAME & ADDRESS(II different from Controlling Office)	15. SECURITY CLASS. (of this report)
USAMRDC	
Fort Deterick	Unclassified
Frederick, Md 21701	15a. DECLASSIFICATION DOWN GRADING
16. DISTRIBUTION STATEMENT (of this Report)	
Approved for public release; distribution unlimited	
•	
	1
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from	
TO THE OTHER STATEMENT (of the spetract entered in Block 20, if different from	n Roport)
	Į.
18. SUPPLEMENTARY NOTES	
Ropeintal with a series of the	
Reprinted with permission, Simula, Inc., Tempe, Ari	zona, Letter dated 4 June 81
19 KEY WORDS (Continue on reverse side if necessary and identify by block number)	
helmet simulator	SPH-4 Helmet
variable helmet weight	į
Variable helmet center of gravity	
	ļ
49. ABSTRACT (Continue on reverse stills if necessary and identify by block number)	
A variable weight, variable CG helmet simulator has	s been designed to measure
the effect of US Army headgear on muscle loading and	d fatigue. The helmet
simulator consists of two weight concealment boxes	attached to opposite sides of

a supporting head which in turn is mounted on the wearer's head by a suspension system taken from an SPH-4 helmet. The weight and CG can be altered by

positioning variable weights within the concealment boxes.

DD 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

ECURITY CLASSIFICATION OF THIS F'GE (When Date Entered)	
· ·	
·	
	}
	ì
	j
	i
	1
	1
	İ
	ļ
	į
	1


FORWARD

The helmet simulator was developed under a subcontract of U. S. Army Contract DAMD-17-80-C-0089 awarded to Wright State University, Dayton, Ohio. The subcontractor was Simula, Inc., Tempe, Arizona.

Mr. Craig M. Svoboda, project engineer, and Mr. James C. Warrick, project manager, Simula, Inc., did the developmental work and prepared this report. The U. S. Army Aeromedical Research Laboratory (USAARL) requested and received permission from Simula, Inc., to reprint and distribute the report.

CPT John C. Johnson,* Biodynamics Research Division, USAARL, served as the contracting officer's technical representative for the project.

Copies of this report have been requested by other government agencies; therefore, it is being reprinted to insure wider distribution. The contract efforts support the U. S. Army Aeromedical Research Laboratory's ongoing biodynamic research projects.

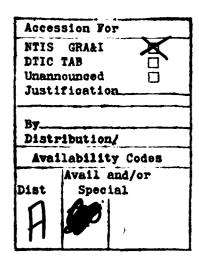



^{*}CPT John C. Johnson is presently assigned to the Letterman Army Institute of Research, Persidio of San Francisco, California.

OPERATOR'S MANUAL FOR VARIABLE WEIGHT, VARIABLE C.G. HELMET SIMULATOR

Prepared for:

Wright State University Dayton, Ohio 45435

Prepared by:

Simula Inc. 2223 South 48th Street Tempe, Arizona 85282

Prepared by:

Approved by:

Craig/M. Svoboda Project Engineer James C. Warrick Project Manager

OPERATOR'S MANUAL

FOR

VARIABLE WEIGHT, VARIABLE C.G. HELMET SIMULATOR

1.0 DESCRIPTION

The helmet simulator consists of two weight concealment boxes attached to opposite sides of a support ring (headring) which in turn is supported upon the wearer's head by a suspension system taken from an SPH-4 helmet. The weight and c.g. can be altered by positioning variable weights within the concealment boxes. Fabric covers over the boxes prevent the test subjects from obtaining visual clues as to the c.g. location.

The minimum weight of the helmet simulator, without any variable weights in the boxes, is 2.5 lb, slightly less than the weight of most quality crash helmets made by reputable manufacturers. The addition of variable weights to the boxes can alter the center of gravity to simulate the effect of equipment attached to the outside of a helmet. The helmet simulator has been calibrated for weights of 3.2, 4.0, 5.0, 7.0, and 9.0 lb for each of the c.g. locations shown in Table 1. Figure 1 illustrates the range of c.g. variations together with definition of the coordinate axes by which the c.g. locations are measured.

As shown in Figure 1, a point midway between the left and right ear canals has been chosen as the origin of the coordinate axes. The helmet simulator has been provided with adjustment to ensure that an index point on it can be aligned with the ear canals, and also with independent adjustment to permit the suspension system to be made comfortable.

TABLE 1. SPECIFIC C.G. LOCATIONS FOR WHICH THE HELMET SIMULATOR IS CALIBRATED

C.G. Location	Displ	acement	(cm) **
Description*	<u>x</u>	<u> </u>	_ <u>z</u>
Central			
Maximum Height	0	0	8.0
Medium Height	0	0	4.0
Low Height	. 0	0	0
Forward			
Maximum Height	5.0	0	8.0
Medium Height	5.0	0	4.0
Low Height	5.0	0	0
Aftward			
Maximum Height	-2.5	0	8.0
Medium Height	-2.5	0	4.0
Low Height	-2.5	0	0
Central			
Left, Maximum Height	0	2.5	8.0
Left, Medium Height	Q	2.5	4.0
Left, Low Height	0	2.5	0
Central			
Right, Maximum Height	0	-2.5	8.0
Right, Medium Height	0	-2.5	4.0
Right, Low Height	0	-2.5	0
Forward			
Left, Maximum Height	4.3	1.8	8.0
Left, Medium Height	4.3	1.8	4.0
Left, Low Height	4.3	1.8	0
Forward			
Right, Maximum Height	4.3	-1.8	8.0
Right, Medium Height	4.3	-1.8	4.0
Right, Low Height	4.3	-1.8	0

^{*}C.G. locations for total weights of less than 4 lb may differ from values shown in this table. See Tables 2 through 8 for exact locations.

^{**}Displacement from head and neck c.g. (axis directions as defined in Figure 1).

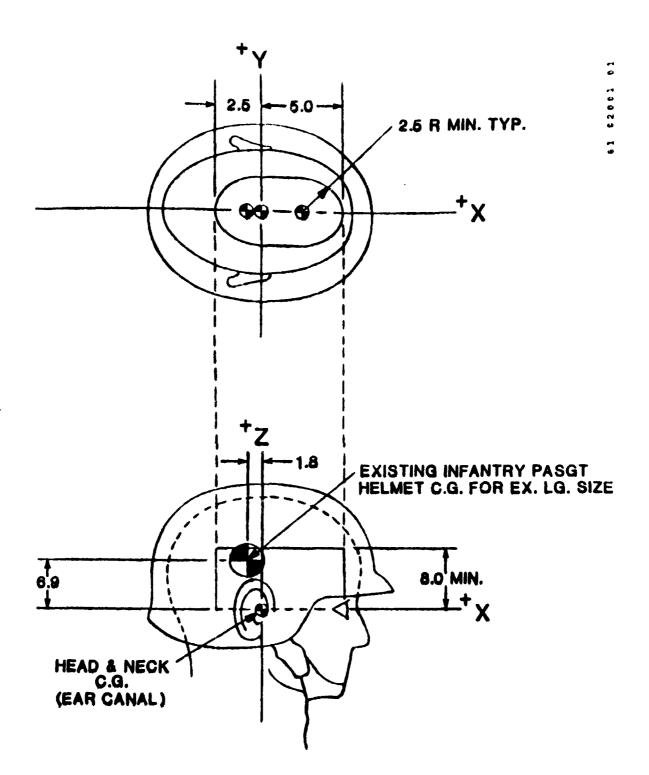


Figure 1. C.G. variation required for test helmet(s) (all dimensions in centimeters).

2.0 ADJUSTMENT TO FIT WEARER'S HEAD

Fitting of the helmet simulator to the subject'; head should be as follows:

. . . .

- 2.1 Remove all weights, weight support tubes, and fabric covers from the concealment boxes.
- 2.2 Place the device on the subject's head.
- 2.3 Adjust the headband suspension buckle.
- 2.4 While applying downward pressure upon the helmet handle to compress the hair, adjust the crown strap buckles (3 places) to permit comfortable vertical positioning of the earcups on the wearer's ears.
- 2.5 Snap and adjust chin strap, also adjust rear earcup retainer strap buckle.
- 2.6 With helmet sitting squarely upon subject's head, readjust all straps.
- 2.7 Determine if ear canals are aligned with holes in concealment boxes. If not, loosen the screw attaching one of the
 weight boxes to the head ring, slide the box to the correct
 position, then retighten the screw. Repeat for the other
 box.
- 2.8 Repeat the preceding steps, if necessary, to obtain snug and comfortable fit.

3.0 ADJUSTMENT OF VARIABLE WEIGHTS

Weights can be installed in the concealment boxes, either with the helmet in place on the subject's head, or with the helmet removed and placed upon a table out of view of the subject. Tables 2 through 8 identify, for chosen combinations of weights and c.g. locations, the quantity of variable weights which must be added to each concealment box and the location of the weights within each box.

The installation of weights can best be understood by studying the following example:

EXAMPLE: Suppose that it has been chosen to test a c.g. location that is forward, to the left, and high. This condition is found in Table 7. Now suppose the total desired weight is 4.0 lb. This condition is found in row two of that table.

Remove the weight tube from the <u>left-hand</u> weight box (if this has not already been done) by pressing on the button and swinging the top of the tube out of the box. Pull the lock pin in the master weight out of engagement with the tube but not completely out of the master weight. Reposition the master weight on the tube so that graduation 22 appears in the window formed by the notch in the master weight as shown in Figure 2, and re-engage the lock pin with the tube. Additional weights, one each 0.2 lb and 0.5 lb, should then be assembled to that side of the master weight which has higher numbered tube graduations.

After loading the left-hand tube with the correct weights, install it by inserting the 3/16-in. diameter end of the tube into hole V in the bottom of the left-hand box. Depress the button at the top of the tube and swing the top of the tube into the box, allowing the button to engage with that hole which is in line with the bottom of the tube.

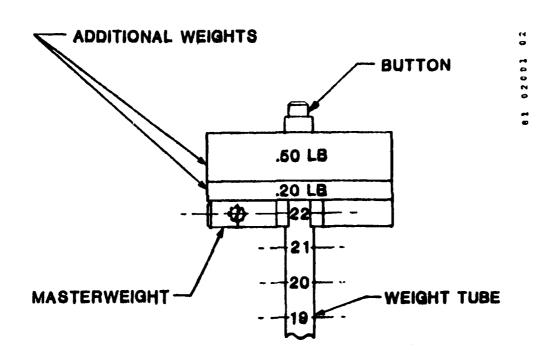


Figure 2. Appearance of weights loaded onto weight tube.

Verify correctness of weight location and quantity. Notice that both the left-hand weight tube and weight concealment box are color coded yellow.

Attach fabric cover, using velcro patches.

Follow similar procedure for the right-hand box: position the master weight at graduation 22; add one each weights of 0.1 and 0.2 lb; and position tube in right-hand box at hole U. Verify correctness, noting that both right-hand weight tube and right-hand box are color coded white. It is NOT necessary for left-hand and right-hand weights to be positioned at identical graduations.

4.0 RECALIBRATION OF HELMET SIMULATOR

Refer to Appendix A for information concerning recalibration if it becomes necessary to perform tests with weight and c.g. combinations other than those for which the belmet simulator has already been calibrated.

TABLE 2. CENTRAL X. CENTRAL Y, VARIABLE Z, AND WEIGHT

Вох		Position of B E Time		æ	b	ט	×	×	н	b	ט	×	×	B1	ם	ט	×	Ж
ı	-16	1.0		ı	1	=	7	ĸ	1	1	н	7	က	1	1		7	3
Right-hand (R.H.	Additional Weights (1b)	0.5	Quantity	1		1	ı	ı	ı	н	ı	1	1	1	-	1	ı	1
hand	dait	0.2	Oua	1	ı	ı	ı	ı	-	l	1	ı	ı	ı	ı	ı	1	ı
ght-1	F. Ac	0.7		-1	ı	ı	ı	ı	1	1	ı	ı	ı	ı	ı	ı	ı	ı
Ri	Position	of Master	R.H. Tube	23	22	19	16	14	6	11	10	10	æ	2	2	2	т	3
de) Box		Position of	in L.H. Box	H	ט	p	×	K	н	מ	ט	×	K	н	ט	ט	×	K
	-1 6	1.0	,	1	ı	٦	7	3	1	ı	Н	7	3	١	ı	п	7	3
(Yellow color co Left-hand (L.H.)	Additional eights (1b)	0.5	Quantity	1	7	ı	ı	ı	i	-	ı	ı	ı	-	ч	ı	1	_
ow c	Additi	0.2	Quar	1	ı	ł	ı	1	ı	ı	ı	ı	ı		i	1	1	1
Yell eft-	A S	0.1		н	ı	í	ı	ı	1	ı	ı	ı	1	1	1	ı	1	ı
- 3		Meight on	L.H. Tu	23	22	19	16	14	60	11	10	10	8	2	8	7	٣	3
		Total	(वा)	3.2	4	ر.	7	6	3.2	4	\$	7	6	3.2	4	'n	^	9
			2	6.8	œ	ч	бтн		4		Neg			2.6	-	0	0	0
		(CE)	X	0	Ģ													
	÷	1	×	0	0													

TABLE 3. FORWARD X, CENTRAL Y, VARIABLE Z, AND WEIGHT

	į.	10 m 6	XO2				- <u></u> -			- 								
вэх		14 TH	IN K.T.	2	×	H	œ	æ	2	×	E	œ	æ	2	×	Ħ	ĸ	α
		0		1	ı	Н	7	m	1	ı	-	7	3		1		7	М
(F. H	Additional eights (1b)	0.5	Quantity	1	٦	١	١	ı	١	н	ı	ı	1	1	н	1	1	1
חשת	Additi Weights	0.2	Quar	ı	ı	ı	1	1	1	,	ı	ı	-	ı	1	ı	1	-
Right-hand	1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	5			ı	ı	1	1		1	١	1	1	7	1	1	ı	,
Ri		of Master Weight on	K.B. June	23	22	19	16	14	6	11	10	10	8	2	7	7	м	3
e) Box		sition of B. Tube	1n L.h. Box	2	×	H	æ	ጽ	2	×	Ē	æ	R	. 2	×	H	œ	æ
, 0		0		(1	-	7	3	1	ı	H	7	9	1)	٦	7	3
ellow color co ft-hand (L.H.)	Additional eights (15)	0.5	Quantity	1	7	ı	ı	ı	ŧ	-	1	1	ı	-	H	1	1	١
ow or hand	Additi Weights		Kog	ı	1	ı	1		ı	1	1	ı	1	-	ı	ı	l	-
Yellow eft-har	33	0.7			ı		1	1	7		<u> </u>		•	7	ı	ı	ı	
X)	Position	of Master Weight on	יייי זייי	23	22	19	91	14	6	11	10	10	83	7	7	7	3	3
	,	Total Weight	a l	3.2	4	5	7	6	3.2	4	\$	7	6	3.2	4	S	7	6
			- 1	8.9	∞	ųi	тн		4	4	Ned			2.6	7	0	0	٥
	C.G. Logenjon	(E)	-	0	0				0	0				0	0			
	, i	<i>></i>	$ \downarrow $	4	ري د				4	2				4	2			

TABLE 4. AFTWARD X, CENTRAL Y, VARIABLE 2, AND WEIGHT

r																		
Вох		Position of E.H. Tube		A	ပ	ы	Į24	ტ	Ą	ບ	ធ	Ē	ဗ	Ą	၁	ы	(£4	v
1	. 3	1.0		1	1	Н	7	3	1	ı	н	7	m	1	1	-	7	т
(H.	Additional Weights (1b)	0.5	Quantity	ı	Н	,	1	1	1	-	1	1	1	1	7	ı	ı	ı
nand	ght	0.2	Quar	•	ı	1	1	1	1	· 1	1	1	1	ı	1	1	ı	1
Right-hand (R.E.)	. Ac	0.1		τ	ı	ı	ı	1	1	ı	ı	ł	ı	1	ı	ı	1	ı
R	Fosition	of Master Weight on	R.H. Tube	23	22	19	16	14	6	11	11	10	80	2	8	7	က	m
le) Box		Position of L.H. Tube	H. Box	A	υ	ណ	[î4	9	Ą	υ	闰	ſε _ι	უ	Ą	υ	ĸ	Œ,	ţ
	-1 3	1.0	,	ŀ	ı	٦	7	3	1	l	н	7	3	ı	ı	н	8	3
lor (L.1	ona (1)	0.5	Quantity	1	Н	ı	ı	ı	ı	Т	ı	ı	ı	-	-	ı	1	ŀ
w Sc nand	Additional Weights (1b)	0.2	Quar	ı	ı	ı	1	1	ı	ı	ı	ł	1	1	ı	1	1	ı
(Yellow solor coc Left-hand (L.H.)	We.	17.		1	ı	ı	1	١	7	ı	ı	ı	ı	1	ı	ı	ı	1
3	Position	of Master Weight on	L.H. Tube	23	22	19	16	14	6	11	11	10	æ	2	7	8	m	3
		Total Weight	(भू	3.2	4	2	7	6	3.2	4	S	7	6	3.2	4	47	7	6
			2	6.8	80	ų	нұа		4	4	Ned			2.6	ત	0	0	0
	7.6. 5000 7000	(iii)	7	0	0				0	0				0	0			
	, 0		×	-1.4	-2.5				-1.4	-2.5				1.4	2.5			

TABLE 5. CENTRAL X, SEFT Y, VARIABLE Z, AND WEIGHS

	4; O	Tube E. Box	æ	<u></u>	רם	г у	ъ	H	ם	ט		ם	H	ъ	ם	ט	ָרָ <i>י</i>
Бэх	Position	ж н ч	, "	ה						. ,	. ,	. ,			.,	٠ ,	
1	و 2 م	(1	ı	1	-	7	'	1	1	Т	7	'	ı	1	H	~
(R.H.)	10nal 5 (1b)	nt:	ı	ı		٦	ı		1	~	-	ı	'	1	H	~	i .
hanc	Additional Weights (1b	Qua	1	<u>н</u>	-	1	7	'	-	н	1	7	,	~		ı	7
Rıght-hand	F. A.		1	ı	1	1	ı	'	ı	ı	ı	1	'	1	ŀ	ı	1
R	Position of Master	Weight on R.H. Tube	23	21	18	16	14	6	10	10	6	∞	2	8	2	м	м
) 30%		L.H. Tube in L.H. Box	Н	ט	b	ט	ט	Ħ	ņ	ט	ט	ט	Н	ט	b	ט	ני
code	1.0		1	ı	-	7	m	ı	ı	н	7	m	1	1	Н	2	м
(Yellow color code) Left-hand (L.H.) Box	Additional eights (1b)	Quantity	I	7	ı	н	1	1	П	ı	н	н	ı	1	1	H	п
ow co	Additi Weights	Quar	Н	7	~	ı	ı	1	н	н	ı	ı	7	7	М	ı	ı
(ellceft-	3 0		١	Н	н	i	г	7	н	H	ı	٦	1	٦	П	ı	~
₽	Position of Master	Weight on L.H. Tube	23	22	19	16	14	6	11	11	σ,	œ	2	8	۲	ĸ	3
	Total	Weignt (1b)	3.2	4	S	7	6	3.2	4	5	7	6	3.2	4	5	7	6
		2	6.8	∞	1	167H		4	4	hed.			2.6	~	0	0	0
	C.G. Location (cm)	7	1.3	2.5				1.3	2.5				1.3	2.5			
	9 9 9	×	0	0				0	0				0	0			

TABLE J. CENTRAL X, PIGHT Y, VARIABLE Z, AND WEIGHT

Box Position of In R.H. Tube in R.H. Box d d d d d	ט ט t	
		 D
	н 7	m
and (R.H.) ditional ghts (lb) 0.2 0.5 1. 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1 1 1 - 1	1 7 7	<u>~</u>
	- 1	1
	н । -	-
Positio of Mast weight R.H. Tu 19 16 11 11 11 22 23 24 19 10 11	0 m n	m
SSI F. H.	י מ מ	' 2
	1 4 6	7
10 - 10 10111	н н ।	ı
Vellow of ft-hand Meights Neights 0.1 0.2 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	п , _с	7
3 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1 1 1	ı
Position of Maste Weight o L.H. Tub 23 23 21 14 10 10 10 2	0 m m	*1
2 4 4 5 6 6 6 7	o ر ده	5
New m upth as an pall of	0 0 0	>
C. G. C. G. C. G. C. G. C. G. C. G.		
X 60 00		

TABLE 7. FORWARD N, LEPT Y, VARIABLE Z, AND WEIGHT

			SON OF	. BOX															
	Вох:		Position E.E. Ta	ir P.E	Z	D	ഗ	O ¹	Д.	2		ഗ	O	Δι	2	n	S	O	Ω,
		- î	1.0	5.	,	1	1	Н	7	١	1	1	-	7	1	1	1	~	α
	(R.E.)	Additional eights (lb)	0.5	Quantity	ı	1	Н	H	-	1	ı	н	-	-		ı	~	-	r-1
	nanĉ	Additi Weights	0.2	Qua	1	-	н		١	١	-	Н	Н	1	,	<i>~</i> -1	~	~ 1	ı
	Richt-hand	¥; ≱	0.1		1	-	٦	ı	٦	1	-		1		'	<u> </u>	~	ı	
	Ri		of Master Weight on	R.H. Tube	23	22	19	16	14	6	11	10	10	6 0	2	2	7	м	٤
	Вох		Position of L.H. Tube	in L.H. Box	Z	Λ	တ	æ	ø	Z	>	S	æ	Ø	2	>	S	æ	a
Code	-	-1 (0	1.0	,	1	ı	н	7	М	1	1	rd	7	m	,	1		7	٣
) i	н.т)	Additional eights (1b)	0.5	Quantity	ı	н	1	1	ı	ı	П	ı	ı	ı	ı	н	ı	ı	ı
3	Left-hand	Additi Weights	0.2	Qua	1	Н	٦	-	2	1	н	н	~	7		н	н		7
Yellow	eft-	We	0.1		1	ı	l	П	,	1	<u> </u>	ı	-	ı	,	ı		7	ı
	, 1		of Master Weight on	L.H. T	23	22	19	16	14	6	10	10	6	∞	2	7	2	4	3
			Total Weight	(qt)	3.2	4	رد د	7	6	3.2	4	S	7	6	3.2	4	S	7	6
		ri C		2	6.8	œ	ų	HŢd		4		Иед			9.2	н	0	0	0
		C.G. Location	Ê	×	1.3	1.8				1.3	1.8				п.3	е. 			
		ğ		×	4.0	4.3				4.0	4.3				.0	£.			


TABLE & FORWARD X, RIGHT Y, VARIABLE Z, AND WEIGHT

Yellow Sft-hand Addit Weight 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	color code) Right-h	onal (1b)	0.2 0.5 1.0 rosition of or master On U.H. Tube Weight on Quantity in L.H. Box R.H. Tube	- - 2 23	U 22	1 - S 19	1 1 0 16 1	1 2 P 14 -	- 6 Z	U	1 - S 10 -	1 1 0 9 1	1 2 p 8 -	- 2 2		1 - S	1 1 0 4 1 1	
	(Yellow Left-hand	Wei	0.7	-	٦	-1	ı	1	ı	н		1	1	•	~	Н	ı	_

APPENDIX A

RECALIBRATION

- Place hemet on scale and add variable weights to provide the desired total weight.
- 2. Assemble the balsa wood calibration brackets to the helmet and drill into each bracket a hole which is in line with the desired c.g. (see Figure A-1).
- 3. Hang the helmet from a string or cable passing through the new hole in one bracket, and shift the weights to level the helmet. (A bubble level attached to the helmet may facilitate this.) See Figure A-2.
- 4. Repeat for the hole in the other bracket (See Figure A-3).
- 5. Record the weight quantity and location on a copy of data sheet (Figure A-4).

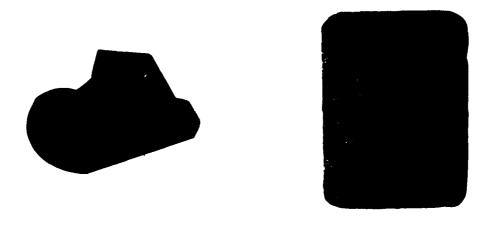

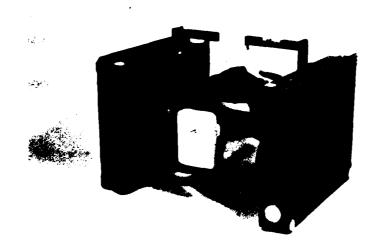


Figure A-1. Balsa wood calibration brackets and assembly on helmet.

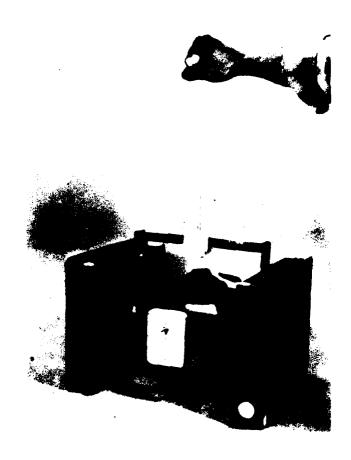


Figure A-2. Suspend helmet by cable attached to proper hole in top bracket. Shift weights between left-hand and right-hand boxes to balance laterally, and shift weight tubes from hole-to-hole to balance in the fore-and-aft direction.

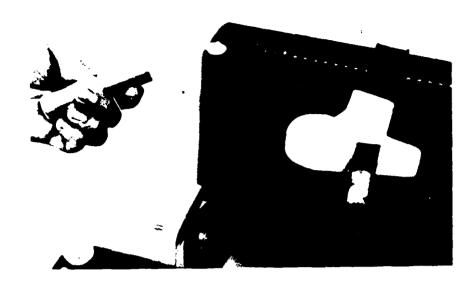






Figure A-3. Relocate cable to proper hole in front bracket, hang helmet and adjust position of weights on each weight tube to balance helmet with aid of bubble level.

			,		
Бож	Post to a	-			
Right-hand (R.H.)	Additional Weights (1b)	Quantity			
Right	Position of Master	R.H. Tube	·		
Вох	Position of				
Left-hand (L.H.) E	Additional Weights (1b)	Quantity			
Left	Position of Master 0	L.H. Tube			
	Total	(मु)	4 10 1- 00	4 5 6	4 70 1 0
		2	Ч 6∓Н	рәи	мод
	C.G. Location (cm,	¥			
	Local	×			

INITIAL DISTRIBUTION

Defense Technical Information Cer Cameron Station		Aeromechanics Laboratory US Army Research & Technology Lab	os
Alexandria, VA 22314	(12)	Ames Research Center, M/S 215-1 Moffett Field, CA 94035	(1)
Under Secretary of Defense for Research and Engineering ATTN: Military Assistant for Medical and Life Sciences Washington, DC 20301	(1)	Sixth United States Army ATTN: SMA Presidio of San Francisco, California 94129	(1)
Uniformed Services University of the Health Sciences 4301 Jones Bridge Road Bethesda, MD 20014	(1)	Director Army Audiology & Speech Center Walter Reed Army Medical Center Forest Glen Section, Bldg 156 Washington, DC 20012	(1)
Commander US Army Medical Research and Development Command ATTN: SGRD-RMS/Ms. Madigan Fort Detrick Frederick, MD 21701	(5)	Harry Diamond Laboratories Scientific & Technical Information Offices 2800 Powder Mill Road Adelphi, MD 20783	on (1)
Redstone Scientific Information Center ATTN: DRDMI-TBD US Army Missile R&D Command Redstone Arsenal, AL 35809	(1)	US Army Ordnance Center & School Library, Bldg 3071 ATTN: ATSL-DOSL Aberdeen Proving Ground, MD 21005	(1)
US Army Yuma Proving Ground Technical Library Yuma, AZ 85364	(1)	US Army Environmental Hygiene Agency Library, Bldg E2100 Aberdeen Proving Ground, MD 21010	(1)
US Army Aviation Engineering Flight Activity ATTN: DAVTE-M (Technical Library Edwards AFB, CA 93523	(1)	Technical Library Chemical Systems Laboratory Aberdeen Proving Ground, MD 21010	(1)
US Army Combat Developments Experimentation Command Technical Library HQ, USACDEC Box 22 Fort Ord, CA 93941	(1)	US Army Materiel Systems Analysis Agency ATTN: Reports Distribution Aberdeen Proving Ground, MD 21005	(1)

US Army Medical Research Institut of Chemical Defense	:e	US Army Field Artillery School Library Snow Hall, Room 16	
Aberdeen Proving Ground 21010	(1)	Fort Sill, 0" 73503	(1)
HQ, First United Statesy ATTN: AFKA-MD (Surgeon Ofc) Fort George G. Meade, MD 20755	(1)	US Army Dugway Proving Ground Technical Library Bldg 5330 Dugway, UT 84022	(1)
20733	(1)	pagway, 01 04022	(1)
Director Ballistic Research Laboratory ATTN: DRDAR-TSB-S (STILLE) Aberdeen Proving Ground, ID 21005	(2)	US Army Materiel Development & Readiness Command ATTN: DRCSG 5001 Eisenhower Avenue Alexandria, VA 22333	(1)
US Army Research & Development Technical Support Activity Fort Monmouth, NJ 07703	(1)	US Army Foreign Science & Technology Center ATTN: DRXST-IS1	
Commander/Director		220 7th St., NE Charlottesville, VA 22901	(1)
US Army Combat Surveillarize & Target Acquisition Laborizatory ATTN: DELCS-D		Commander	
Fort Monmouth, NJ 07703	(1)	US Army Training and Doctrine Cor ATTN: ATCD Fort Monroe, VA 23651	
US Army Avionics R&D Act: ity ATTN: DAYAA-O		Commander	(2)
Fort Monmouth, NJ 07703	(1)	US Army Training and Doctrine Cor ATTN: Surgeon	mrand
US Army White Sands Missi :e Range Technical Library Divisi	and the second	Fort Monroe, VA 23651	(1)
White Sands Missile Range		US Army Research & Technology Lat)S
	(1)	Structures Laboratory Library NASA Langley Research Center	
Benet Weapons Laboratory LCWSL, USA ARRADCOM		Mail Stop 266 Hampton, VA 23665	(1)
ATTN: DROAR-LCB-TL		Commander	
Watervliet Arsenal		10th Medical Laboratory	
Watervliet, NY 12189	(1)	ATTN: DEHE (Audiologist) APO New York 09180	(1)
US Army Research & Technology Lab	S		,
Propulsion Laboratory MS 77-5		Commander	
NASA Lewis Research Centar	4	US Army Natick R&D Laboratories	
Cleveland, OH 44135	(1)	ATTN: Technical Librarian Natick, MA 01760	(1)

Commander		US Air Force Armament Developmen	t
US Army Troop Support & Aviation Materiel Readiness Command		& Test Center Technical Library	
ATTN: DRSTS-W		Eglin AFB, FL 32542	(1)
St. Louis, MO 63102	(1)		•
		US Air Force Institute of Techno	Jogy
Commander		(AFIT/LDE)	
US Army Aviation R&D Command ATTN: DRDAV-E		Bldg 640, Area B Wright-Patterson AFB, OH 45433	(1)
P. O. Box 209		Wright-ratterson Arb, On 43433	(1)
St. Louis, MO 63166	(1)	US Air Force Aerospace Medical	
	\ •	Division	
Director		School of Aerospace Medicine	
US Army Human Engineering Laborate	ory	Aeromedical Library/TSK-4	
AITN: Technical Library		Brooks AFB, TX 78235	(1)
Aberdeen Proving Ground, MD	(1)	Director of Professional Services	_
21005	(1)	Office of The Surgeon General	S
Commander		Department of the Air Force	
US Army Aviation R&D Command		Washington, DC 20314	(1)
ATTN: Library		•	•
P. O. Box 209		Human Engineering Division	
St. Louis, MO 63166	(1)	Air Force Aerospace Medical	
Carmandan		Research Laboratory	
Commander US Army Health Services Command		ATTN: Technical Librarian Wright-Patterson AFB, OH 45433	(1)
ATTN: Library		winght-racterson Aib, on 43433	(1)
Fort Sam Houston, TX 78234	(1)	US Navy	
, , , , , , , , , , , , , , , , , , , ,		Naval Weapons Center	
Commandant		Technica Library Division	
US Army Academy of Health Sciences	5	Code 2333	
ATTN: Library	(4)	China Lake, CA 93555	(1)
Fort Sam Mouston, TX 78234	(1)	IIC Nave	
Commander		US Navy Naval Aerospace Medical Institute	
US Army Airmobility Laboratory		Library	•
ATTN: Library		Bldg 1953, Code 012	
Fort Eustis, VA 23604	(1)	Pensacola, FL 32508	(1)
4. (1.1		400 M	
Air University Library (AUL/LSE) Maxwell AFB, AL 36112	(1)	US Navy	1 44
PRIME NEW , AL SOITZ	(1)	Naval Submarine Medical Research Medical Library, Naval Submarine	
US Air Force Flight Test Center		Box 900	nase
Technical Library, Stop 238		Groton, CT 06340	(1)
Edwards AFB, CA 93523	(1)	• • • • • • • • • • • • • • • • • • •	• - •

Director Naval Biosciences Laboratory Naval Supply Center, Bldg 844		Commanding Officer Naval Biodynamics Laboratory F. O. Box 29407	
Dakland, CA 94625	(1)	New Orleans 70189	(1)
Naval Air Systems Command Technical Library AIR 950D Rm 278 Jefferson Plaza II	,	FAA Civil Aeromedical Institute ATTN: Library Box 25082	
Department of the Navy Washington, DC 20361	(1)	Oklahoma City, OK 73125	(1)
US Navy Naval Research Laboratory Library Code 1433 Washington, DC 20375	(1)	Department of Defence R.A.N. Research Laboratory P. O. Box 706 Darlinghurst, N.S.W. 2010 Australia	(1)
US Navy Naval Air Development Center Technical Information Division Technical Support Department Warminster, PA 18974	(1)	Canadian Society of Avn Med c/o Academy of Medicine, Toronto ATTN: Ms. Carmen King 288 Bloor Street West Toronto, Ontario M5S 1V8	(1)
Human Factors Engineering Division Aircraft & Crew Systems Technology Directorate		COL F. Cadigan DAO-AMLOUS B	(1)
Naval Air Development Center Warminster, PA 18974	(1)	Box 36, US Embassy FPO New York 09510	(1)
US Navy Naval Research Laboratory Library Shock & Vibration Information Cent Code 8404	er	DCIEM/SOAM MAJ J. Soutendam (Ret.) 1133 Sheppard Avenue West P. O. Box 2000	
Washington, DC 20375	(1)	Downsview, Ontario M3M 3B9	(1)
Director of Biological & Medical Sciences Division Office of Naval Research		Dr. E. Hendler Code 6003	
800 N. Quincy Street Arlington, VA 22217	(1)	Naval Air Development Center Warminster, PA 18974	(1)
Commanding Officer Naval Medical R&D Command National Naval Medical Center		Commander US Army Transportation School ATTN: ATSP-TD-ST	
Bethesda, MD 20014	(1)	Fort Eustis, VA 23604	(1)

Staff Officer, Aerospace Medicine RAF Staff British Embassy 3100 Massachusetts Avenue, N.W. Washington, DC 20008 (1)

